ASTROLITE Mobile

Collaborative desks




buronomic

DATA **SHEET**


ASTROLITE Mobile

Synoptique


STRAIGHT DESKS - with cable port




STRAIGHT DESKS - with single opening Top Access hatch



STRAIGHT DESKS - with scalloped edge




MEETING TABLES - Rectangular and barrel tables

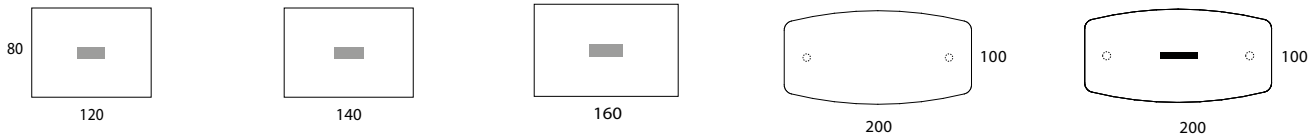

ASTROLITE Mobile

GARANTIE 10 ANS

CHARACTERISTICS



Metal legs finishes




Tops MFC finishes

Single desks




Tops with cable ports
(D 80 cm)




Tops with scalloped edge
(D 80 cm)



Tops with Top Access hatch
(D 80 cm)



Arch leg




Desk - bottom view

Meeting rectangular and barrel tables



Tops with part drilled cable ports and
part drilled mini Top Access hatch
(D 80 cm)




Tops with part drilled cable ports
and built-in electrical socket strip
(D 100 cm)

Top

25 mm thick Structurex® melamine-coated tops. 2 mm thick shock-proof ABS edging.

Electrification

Top fitted with **Ø 80 mm cable ports**, a single Top Access hatch or a 2 cm deep scallop, depending on version.

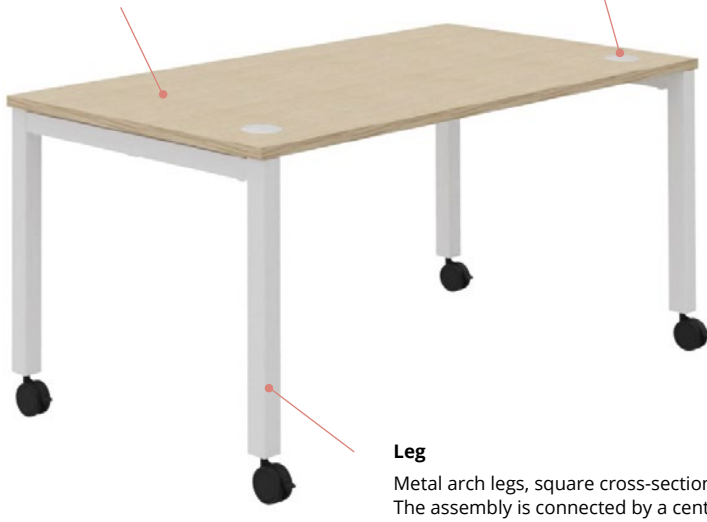

Castors

Ø 75 mm lockable castors.

Leg

Metal arch legs, square cross-section 50 x 50 mm. The assembly is connected by a central steel beam with lacquered epoxy finish.

ASTROLITE Mobile

Tops

- Structurex® - Melamine-coated particle board, 25 mm thick, high density 650 kg/m3 (+/-5 %), 2 decorative sides counterbalanced with anti-reflection treatment.
- 2 mm thick shock-proof ABS straight edging, radiused and matching the top finishes.
- Metal inserts for improved tear resistance and easier assembly.


- **3 cable management versions :**



Cable ports : Tops D 80 cm fitted with cable ports (Ø 80 mm) finishes matching the leg finishes.



Top Access : Tops D 80 cm fitted with single opening Top Access hatch (internal dimensions L 309 x D 116 mm), centred and positioned 50 mm from the outer edge of the top. Aluminium, black or white finishes matching the leg finishes. Optional cable trays.




Scalloped edge : Tops D 80 cm with groove (internal lengths : L 50 cm for L 120 cm tops, L 70 cm for L 140 cm tops, L 90 cm for L 160 cm tops, L 110 cm for L 180 cm tops / D 20 mm).

- Plateaux 100% PEFC issus de forêts gérées durablement.
- Certification E1, répondant à la norme NF EN-717-2.
- Classement au feu M2.


Legs

- Metal arch legs, lacquered epoxy finish (see colour chart).
- Welded steel tube, cross-section 50 x 50 mm.
- Lacquered epoxy finishes available : aluminium grey (RAL 9006) – white (RAL 9016) – black (RAL 9005).
- Legs with Ø 75 mm castor with brakes H 72 cm.

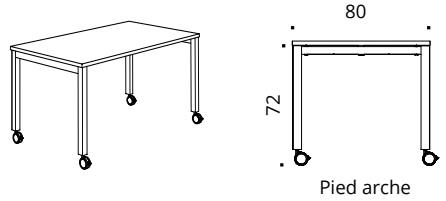

Structures


- Structural metal beams, cross-section 45 x 25 mm, fitted with 2 end fittings to connect the legs and provide perfect stability.
- Height under beam : +/- 64,5 cm.
- Lacquered epoxy finishes matching the legs : aluminium grey (RAL 9006) – white (RAL 9016) – black (RAL 9005).
- Single desks (D 80 cm) fitted with 1 beam.



Meeting tables

- Structurex® – Melamine-coated particle board, 25 mm thick, high density 650 kg/m3 (+/-5 %),
- 2 decorative sides counterbalanced with anti-reflection treatment.
- 2 mm thick shock-proof ABS straight edging, radiused and matching the top finishes.
- Metal inserts for improved tear resistance and easier assembly.
- Metal arch legs, lacquered epoxy finish (see colour chart). Welded steel tube, cross-section 50 x 50 mm. Legs with Ø 75 mm castor with brakes H 72 cm.

- **Rectangular tables:**
  - Tops available in D 80 / L 120, L 140 , L 160 cm




Tops with 2 part-drilled cable ports (Ø 80 mm) and 1 part-drilled central rectangular Top Access hatch (240 x 120mm).



Option : Metal Top Access hatch, to be fitted onto the tops (part-drilled Top Access hatch), allow for central cables management. Dim. 24 x12 cm.

- **Barrel tables :**
  - Dimensions : L 200 x D 100 cm / H 72 cm.
  - Table fitted with 2 part-drilled cable ports under the top for the cable management or with built-in electrical socket strip (cutout dim. L 313 x D 59 mm), equipped with 3 power outlets + 1 USB A charging socket 5v + 1 USB C charging socket 5v + 1 cable port.
  - The electrical socket strip is pre-wired with 2 m cable for the power outlets.
  - Optional cable trays

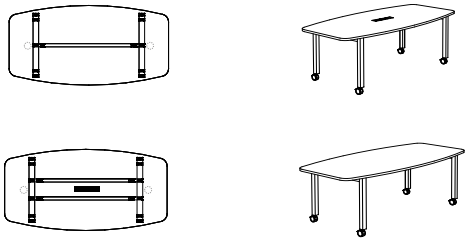

Cable management



Cable ports : Tops D 80 cm fitted with cable ports (Ø 80 mm) finishes matching the leg finishes.




Top Access : Tops D 80 cm fitted with single opening Top Access hatch (internal dimensions L 309 x D 116 mm), centred and positioned 50 mm from the outer edge of the top. Aluminium, black or white finishes matching the leg finishes. Optional cable trays.




Scalloped edge : Tops D 80 cm with groove (internal lengths : L 50 cm for L 120 cm tops, L 70 cm for L 140 cm tops, L 90 cm for L 160 cm tops, L 110 cm for L 180 cm tops / D 20 mm).

- **Metal cable trays for desks and meeting tables:**
  - Optional metal cable trays (1.2 mm thick steel), for desks and meeting tables.
  - Free attachment under tops using wood screws.
  - Single cable tray D 160 x H80 mm (under top). Internal dimensions : D 135 x H 40 mm.
  - Internal lengths : L 90 for L120 cm desks, L 110 for L 140 cm desks, L 130 for L 160 cm desks, L 150 for L 180 cm desks.
  - Aluminium, white or black finishes.



- **Vertical cable management :**
  - By optional metal cable channel (L 45 x D 15 x H 610 mm), available in 3 finishes matching the lgs.



buronomic

ZI du Poudreux
Route Samuel de Champlain
14600 Honfleur

Tél : 02 31 81 66 00

www.buronomic.com
contact@buronomic.com

Les données de cette fiche sont valides à sa date d'élaboration. Toute évolution du produit ne donne pas systématiquement lieu à mise à jour lorsque les caractéristiques fondamentales produit ne sont pas modifiées.
Le fabricant se réserve le droit de faire évoluer le produit sans préavis.
Version maj 02/2025