COHESION

Coworking




buronomic

DATA **SHEET**


COHESION

Synoptic


COHESION TABLES - with cable management

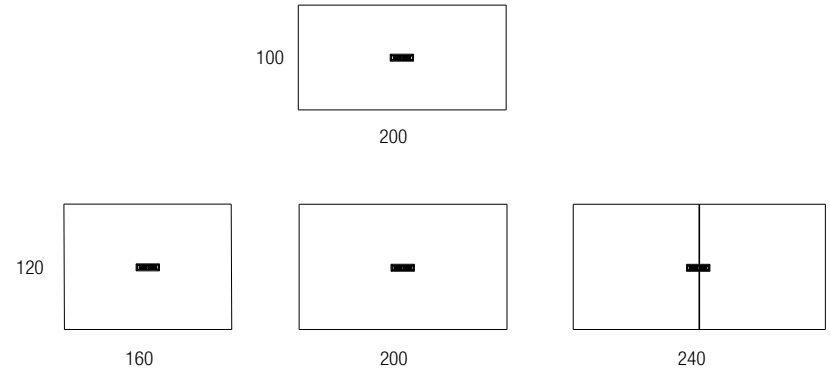


COHESION TABLES - without cable management

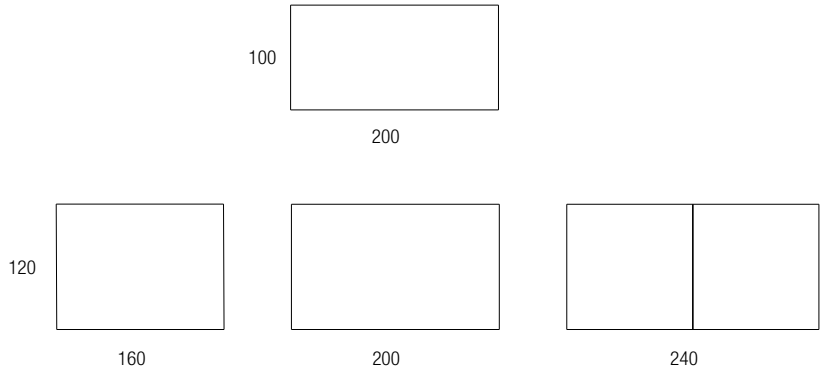

CHARACTERISTICS

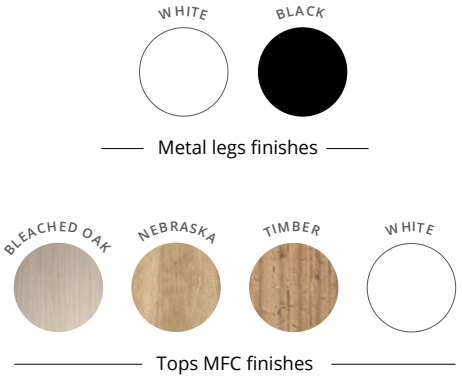

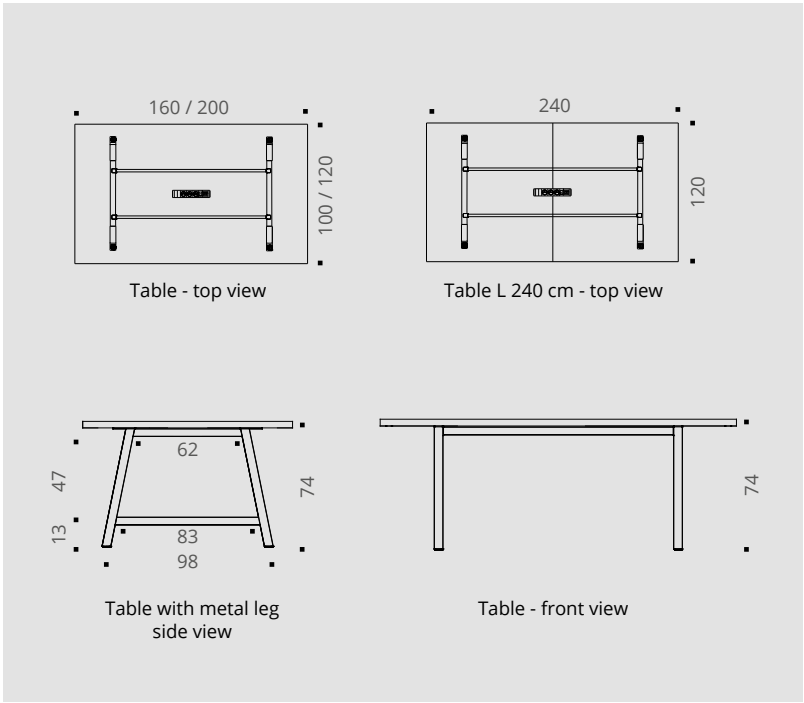

COHESION

WARRANTY 10 YEARS


Electrification (depending on version)

Built-in electrical socket strip equipped with 3 power outlets
+ 1 USB A charging socket 5v
+ 1 USB C charging socket 5v
+ 1 cable port.



Top

38 mm thick Nitech® honeycomb melamine-coated tops. 2 mm thick shock-proof ABS edging. Height 74 cm.

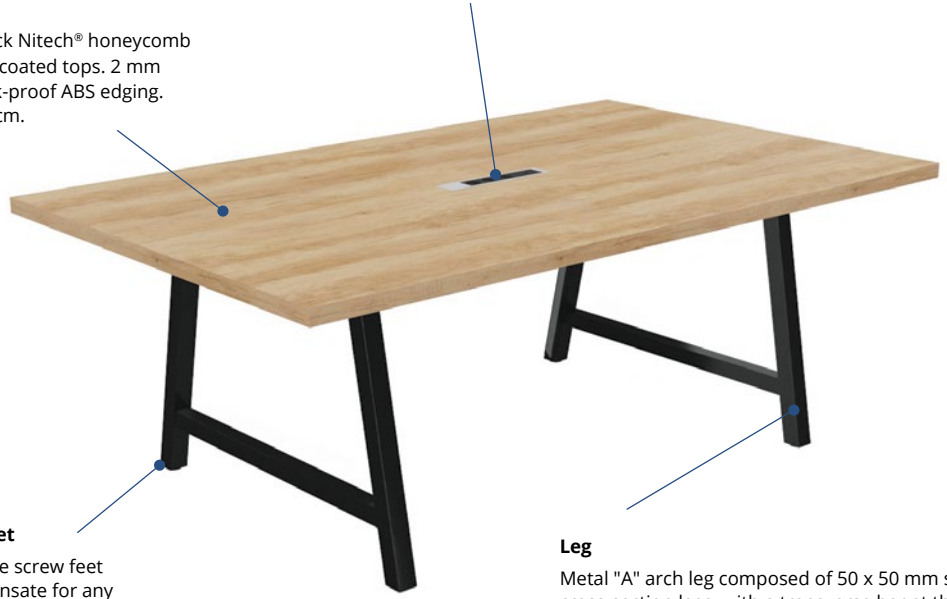

Screw feet

Adjustable screw feet to compensate for any unevenness in the floor.

Leg

Metal "A" arch leg composed of 50 x 50 mm square cross-section legs, with a transverse bar at the bottom, lacquered epoxy finish.

COHESION



Tops

- Nitech® – cardboard honeycomb core faced with 8 mm thick melamine-coated particle board, 38 mm thick, density 330 kg/m3 (+/-5 %), 2 decorative sides counterbalanced with anti-reflection treatment.
- 2 mm thick shock-proof ABS straight edging, radiused and matching the top finishes.
- Metal inserts for improved tear resistance and easier assembly.
- Tops available in depth 100 and 120 cm / L 160, L 200 or L 240 cm (depending on layout).
- Cable management : Available with or without central built-in electrical socket strip (cutout dim. L313 x D59 mm), equipped with 3 power outlets + 1 USB A charging socket 5v + 1 USB C charging socket 5v + 1 cable port.
- 100 % PEFC tops from sustainably managed forests.
- Honeycomb core 100 % recycled paper.
- E1 certification in compliance with standard NF EN-717-2.
- M3 fire classification.

Legs

- Metal “A“ arch leg composed of 50 x 50 mm square cross-section legs, with a transverse bar in the bottom, lacquered epoxy finishes available : white (RAL 9016) – black (RAL 9005).

- 74 cm high worktops. Adjustable screw jacks (Ø 40 mm), stroke 10 mm, mounted on metal thread.





Table with metal leg
side view

Structures

- Structural metal beams, cross-section 45 x 25 mm, equipped with 2 end fittings to connect the legs and provide perfect stability.
- Height under beam : +/- 65 cm.
- Lacquered epoxy finishes available matching the legs : white (RAL 9016) – black (RAL 9005).
- Tables without cable management fitted with 1 beam. (except table with dimensions 240 x 120 cm fitted with 2 beams)
- Tables with cable management fitted with 2 beams.



Cable management

- **Tops :**
  - Available with or without built-in electrical socket strip (cutout dim. L 313 x D 59 mm), equipped with 3 power outlets + 1 USB A charging socket 5v + 1 USB C charging socket 5v + 1 cable port.



  - The electrical socket strip is pre-wired with 2 m cable for the power outlets.
  - Customisation of electrical units with 4 kits as options :



2 RJ45 + finishing cover



1 RJ45 + 1 HDMI + finishing cover




1 RJ45 + 1 data USB A
+ finishing cover



1 data USB A + 1 HDMI
+ finishing cover

The cable port can be replaced by one of the 4 optional kits of your choice

  - A plastic universal cable duct is included for tables with cable management D 65 x H 45 x L 155 mm.



- **Vertical cable management :**
  - By optional magnetic metal cable channel (L 45 x D 15 x H 610 mm), available in 2 finishes matching the legs.



COHESION



buronomic

ZI du Poudreux
Route Samuel de Champlain
14600 Honfleur

Tel : +33 (0)2 31 81 66 00

www.buronomic.com
contact@buronomic.com

The data in this sheet is valid at the date of preparation.
Any evolution of the product does not systematically give rise to update when the fundamental characteristics of the product are not modified.
The manufacturer reserves the right to change the product without notice.
Version 02/2023

HIGH COHESION

Coworking




buronomic

DATA **SHEET**


HIGH COHESION

Synoptic

HIGH COHESION TABLES - with cable management

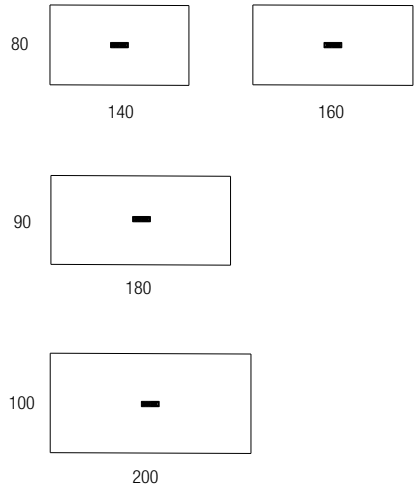


HIGH COHESION TABLES - without cable management

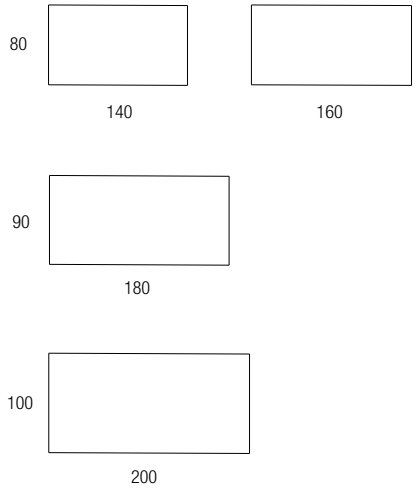

CHARACTERISTICS

HIGH COHESION



Metal legs finishes



Tops MFC finishes





Table - top view



High table with metal leg side view




Table - front view

Top

38 mm thick Nitech® honeycomb melamine-coated tops. 2 mm thick shock-proof ABS edging. Height 107 cm.



Screw feet

Adjustable screw feet to compensate for any unevenness in the floor.

Structure

Metal structural foot-rest bar, cross-section section 40 x 40 mm, lacquered epoxy finish.

Electrification (depending on version)

Built-in electrical socket strip equipped with 3 power outlets
+ 1 USB A charging socket 5v
+ 1 USB C charging socket 5v
+ 1 cable port.



Leg

Metal "A" arch leg composed of 50 x 50 mm square cross-section legs, with a transverse bar at the bottom, lacquered epoxy finish.

HIGH COHESION




Tops

- Nitech® – cardboard honeycomb core faced with 8 mm thick melamine-coated particle board, 38 mm thick, density 330 kg/m3 (+/-5 %), 2 decorative sides counterbalanced with anti-reflection treatment.
- 2 mm thick shock-proof ABS straight edging, radiused and matching the top finishes.
- Metal inserts for improved tear resistance and easier assembly.
- Tops available in depth 80, 90, 100 / L 140, L 160, L 180 or L 200 cm (depending on layout).
- Cable management : Available with or without central built-in electrical socket strip (cutout dim. L 313 x D 59 mm), equipped with 3 power outlets + 1 USB A charging socket 5v + 1 USB C charging socket 5v + 1 cable port.
- 100 % PEFC tops from sustainably managed forests.
- Honeycomb core 100 % recycled paper.
- E1 certification in compliance with standard NF EN-717-2.
- M3 fire classification.

Legs


- Metal “A“ arch leg composed of 50 x 50 mm square cross-section legs, with a transverse bar in the bottom, lacquered epoxy finishes available : white (RAL 9016) – black (RAL 9005).
- 107 cm high worktops. Adjustable screw jacks (Ø 40 mm), stroke 10 mm, mounted on metal thread.



High table with metal leg
Side view

Structures

- Structural metal beam, cross-section 45 x 25 mm, equipped with 2 end fittings to connect the legs and provide perfect stability in the upper part, structural foot-rest bar, cross-section 40 x 40 mm, in the lower part.
- Height under beam : +/- 97,5 cm
- Lacquered epoxy finishes available matching the legs : white (RAL 9016) – black (RAL 9005).
- Tables without cable management fitted with 1 beam.
- Tables with cable management fitted with 2 beams.



Cable management

- **Tops :**
  - Available with or without built-in electrical socket strip (cutout dim. L 313 x D 59 mm), equipped with 3 power outlets + 1 USB A charging socket 5v + 1 USB C charging socket 5v + 1 cable port.
  - The electrical socket strip is pre-wired with 2 m cable for the power outlets.
  - Customisation of electrical units with 4 kits as options :




2 RJ45 + finishing cover



1 RJ45 + 1 HDMI + finishing cover


1 RJ45 + 1 data USB A
+ finishing cover


1 data USB A + 1 HDMI
+ finishing cover


The cable port can be replaced by one of the 4 optional kits of your choice

- A plastic universal cable duct is included for tables with cable management D 65 x H 45 x L 155 mm.




HIGH COHESION

- **Metal cable tray :**
  - Universal metal cable tray which can be positioned between the structural beams to take the cables from the electrical socket strip.
  - Dimensions : D 120 x H 90 x L 600 mm.
  - Internal height : H 80 mm.



- **Vertical cable management :**
  - By optional magnetic metal cable channel (L 45 x D 15 x H 610 mm), available in 2 finishes matching the legs.





buronomic

ZI du Poudreux
Route Samuel de Champlain
14600 Honfleur

Tel : +33 (0)2 31 81 66 00

www.buronomic.com
contact@buronomic.com

The data in this sheet is valid at the date of preparation.
Any evolution of the product does not systematically give rise to update when the fundamental characteristics of the product are not modified.
The manufacturer reserves the right to change the product without notice.
Version 03/2025