ENVOL Classic

Ergonomic desks




buronomic

DATA **SHEET**


WARRANTY 5 YEARS

Synoptic


STRAIGHT DESKS - with cable ports

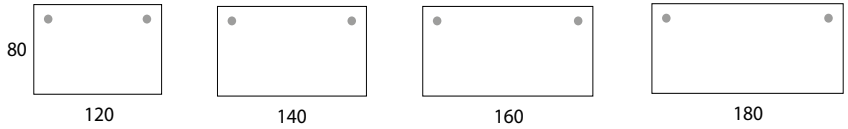


STRAIGHT DESKS - with single opening Top Access hatch

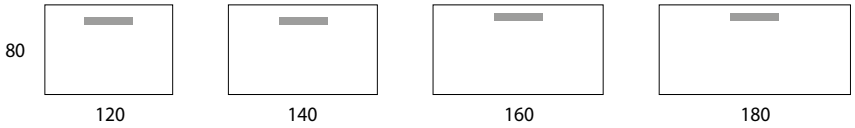


STRAIGHT DESKS - with scalloped edge

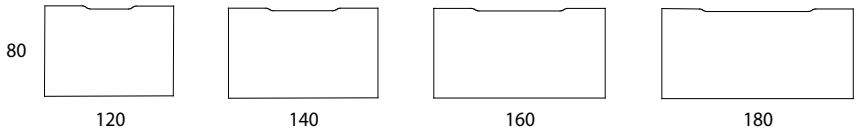

CHARACTERISTICS

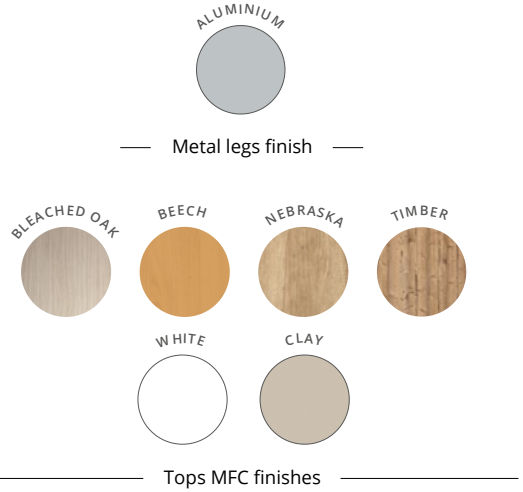

ENVOL Classic





Adjustment by retractable crank under the top.

WARRANTY 5 YEARS

Top

25 mm thick Structurex® melamine-coated desk tops, protected by 2 mm thick. Height-adjustable from H 71 to H 115 cm.

Electrification

Top fitted with **2 Ø 80 mm cable ports**, a single Top Access hatch or a 2 cm deep scallop, depending on version.




Castors

Optional lockable castors.

Single desk

Single desk leg

Metal legs composed of 2 sections, cross-section 80 x 50 mm, lacquered epoxy finish. Mechanically height-adjustable desks from H 71 to H 115 cm.



Tops with cable ports (D 80 cm)





Tops with scalloped edge (D 80 cm)




Tops with Top Access hatch (D 80 cm)

SINGLE DESKS





Front view



Side view

Furniture in compliance with standards NF EN 527-1/-2/-3, NF EN 14074, NFD 62042, ISO 9241-5, XPD 60050 - M2 fire classification – 5-year warranty.

ENVOL Classic

WARRANTY 5 YEARS

Tops

- Structurex® - Melamine-coated particle board, 25 mm thick, high density 650 kg/m3 (+/-5 %), 2 decorative sides counterbalanced with anti-reflection treatment.
- 2 mm thick shock-proof ABS straight edging, radiused and matching the top finishes.
- Metal inserts for improved tear resistance and easier assembly.


- **3 cable management versions :**



Cable ports : Tops D 80 cm fitted with aluminium finish cable ports (Ø 80 mm) as standard (white or black available on option).



Top Access : Tops D 80 cm fitted with single opening Top Access hatch (internal dimensions L 309 x D 116 mm), centred and positioned 50 mm from the outer edge of the top. Aluminium finish matching the leg finish. Optional cable channels.




Scalloped edge : Tops D 80 cm with groove. (Internal lengths : L 50 cm for L 120 cm Tops, L 70 cm for L 140 cm Tops, L 90 cm for L 160 cm Tops, L 110 cm for L 180 cm Tops / D 20 mm).

- 100 % PEFC tops from sustainably managed forests.
- E1 certification in compliance with standard NF EN-717-2
- M2 fire classification.


Legs

- Telescopic metal structures made of rectangular 50 x 80 mm steel tubing.




Front view

- Mechanically height-adjustable (from H 71 to H 115 cm) legs composed of 2 sections, by crank.




Side view





- Mechanical height-adjustment system, with adjustment by retractable crank under the top.
- Sound level 50 decibel.
- Displacement speed 8 mm/s.
- Maximum load 80 kg per top.
- Finish available : aluminium (RAL 9006)
- Adjustable screw feet (Ø 58 mm), stroke 10 mm, mounted on metal thread





Cable management

- **Tops :**



Cable ports : Tops D 80 cm fitted with aluminium finish cable ports (Ø 80 mm) as standard.



Top Access : Tops D 80 cm fitted with single opening Top Access hatch (internal dimensions L 309 x D 116 mm), centred and positioned 50 mm from the outer edge of the top. Aluminium finish matching the leg finish. Optional cable trays.




Scalloped edge : Tops D 80 cm with groove. (Internal lengths : L 50 cm for L 120 cm Tops, L 70 cm for L 140 cm Tops, L 90 cm for L 160 cm Tops, L 110 cm for L 180 cm Tops / D 20 mm).

- **Metal cable tray :**

Universal cable tray :

- Optional sheet steel metal cable tray.
- For single desks **(compatible with the optional fabric acoustic screen panel).**
- Attachment by wood screws under the top.
- Cable tray D 120 x H 90 x L 600 mm (under the top). Internal height : 80 mm.
- Aluminum finish.




- **Extendable spine cable channel :**
  - White ABS extendable spine cable channel.
  - Dimensions : Ø 9 cm / Extendable height adapted to the desk with up to 1,5m.
  - To be fixed by wood screws under top.
  - Weighted base to remain on the ground when adjusting the desk.




[Options]

- **Fabric acoustic screen panels :**
  - The fabric screens comprise 1 x 19 mm thick Nitech® honeycomb melamine-coated panels with rounded corners (radius 30 mm) covered with foam sound-absorbing melamine, 25 mm thick.
  - Screens covered in Step Melange fabric, 100% Trevira CS, M1 fire resistance panel, certified Oeko-Tex.
  - 4 sizes of fabric front dividers : L 120 / L 140 / L 160 / L 180 cm x H 67 cm.
  - Metal fixing clamps available in aluminium finish for single desks.

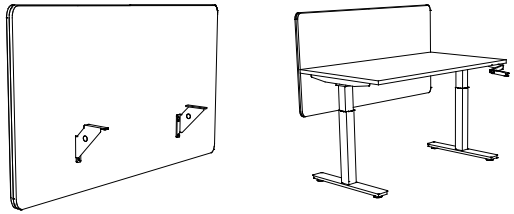


Screen panel – single desk

- **Plexiglass topper for fabric screen :**
  - H 30 cm toppers in transparent 6 mm thick plexiglass with round corners.
  - Metal fixing clamps perfectly suited for positioning on top of our fabric screens.
  - Total height of fabric screen and screen topper : 97 cm.



ENVOL Classic

- **Set of 4 single desk casters :**
  - Bag of 4 casters for single desk.
  - Soft wheel casters (Ø 60 mm) with brakes.
  - Non-slip, vibration-proof and sound-proof damper.
  - Load capacity 120 kg.





buronomic

ZI du Poudreux
Route Samuel de Champlain
14600 Honfleur

Tel : +33 (0)2 31 81 66 00

www.buronomic.com
contact@buronomic.com

The data in this sheet is valid at the date of preparation.
Any evolution of the product does not systematically give rise to update when the fundamental characteristics of the product are not modified.
The manufacturer reserves the right to change the product without notice.
Version 02/2025