ENVOL Evo

Ergonomic desks



buronomic


DATA **SHEET**

ENVOL Evo


WARRANTY 5 YEARS

Synoptic


STRAIGHT DESKS - with cable ports




MULTI-WORKSTATIONS - with cable ports

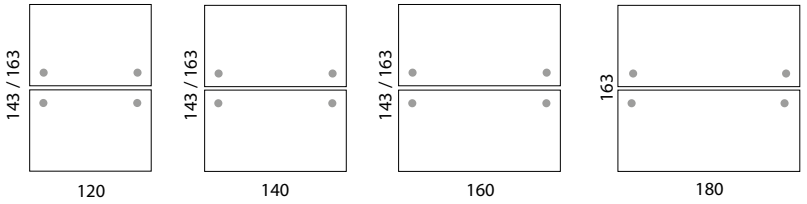


STRAIGHT DESKS - with single opening Top Access hatch




MULTI-WORKSTATIONS - with single opening Top Access hatch

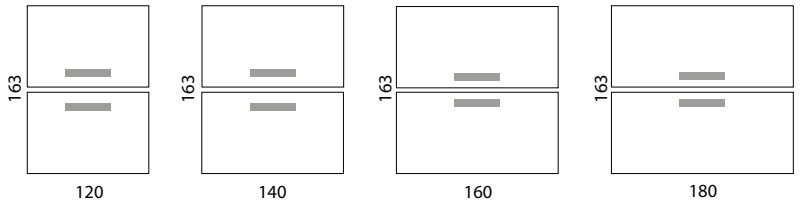


STRAIGHT DESKS - with scalloped edge

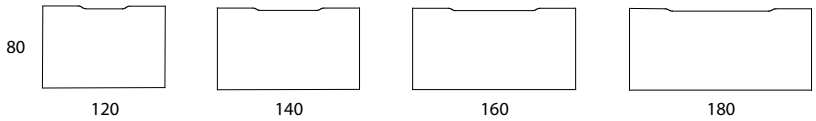


MULTI-WORKSTATIONS - with scalloped edge

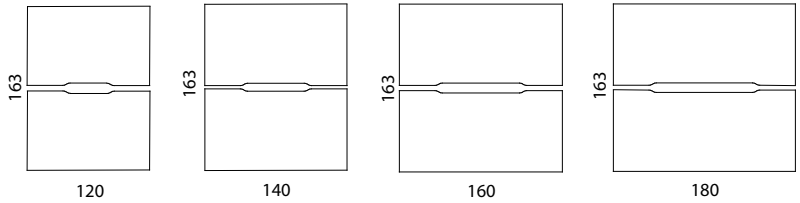

MEETING TABLE - Barrel table - with part drilled cable ports

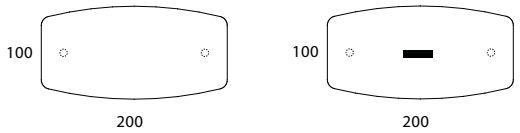


MEETING TABLE - Rectangular table - with or without 1 opening for build-in electrical socket strip.





ENVOL Evo

CHARACTERISTICS




Metal legs finishes






Tops MFC finishes



Tops with cable ports (D 80 cm)





Tops with scalloped edge (D 80 cm)




Tops with Top Access hatch (D 80 cm)

SINGLE DESKS







Front view




Side view

MULTI-WORKSTATION





Front view



Side view



Single desk

Single desk leg

Metal legs composed of 3 sections, cross-scetion 70x70 mm, lacquered epoxy finish. Electrically heigh-adjustable desks from H 63 to H 128 cm.

Electrification


Top fitted with **2 Ø 80 mm cable ports,** a single Top Access hatch or a scallop, depending on version.

Top

25 mm thick Structurex® melamine-coated desk tops. 2 mm thick shock-proof ABS edging. Height adjustable from H 63 to H 128 cm.



Motorised height adjustment system, with up & down control unit, 4 programmable positions, and 1 USB A + 1 USB C charging socket 5v.

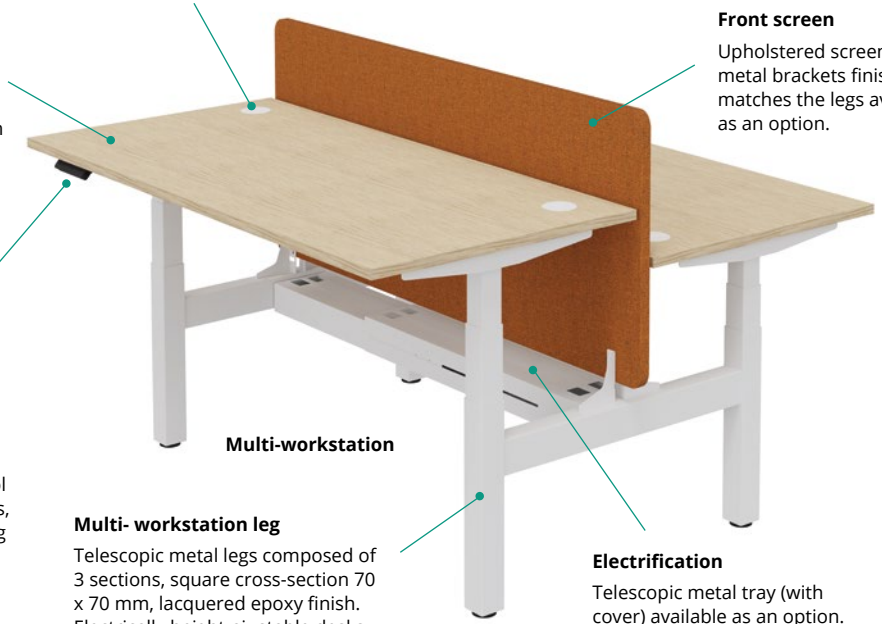

Multi-workstation

Front screen

Upholstered screen with metal brackets finish matches the legs available as an option.

Multi- workstation leg

Telescopic metal legs composed of 3 sections, square cross-section 70 x 70 mm, lacquered epoxy finish. Electrically height-ajustable desks from H63 to 128 cm.

Electrification

Telescopic metal tray (with cover) available as an option.

ENVOL Evo



Tops

- Structurex® - Melamine-coated particle board, 25 mm thick, high density 650 kg/m3 (+/-5 %), 2 decorative sides counterbalanced with anti-reflection treatment.
- 2 mm thick shock-proof ABS straight edging, radiused and matching the top finishes.
- Metal inserts for improved tear resistance and easier assembly.

- **3 cable management versions :**



Cable ports : Tops D 80 cm fitted with cable ports (Ø 80 mm) finishes matching the leg finishes.




Top Access : Tops D 80 cm fitted with single opening Top Access hatch (internal dimensions L 309 x D 116 mm), centred and positioned 50 mm from the outer edge of the top. Aluminium, black or white finishes matching the leg finishes. Optional cable trays.



Scalloped edge : Tops D 80 cm with groove (internal lengths : L 50 cm for L 120 cm tops, L 70 cm for L 140 cm tops, L 90 cm for L 160 cm tops, L 110 cm for L 180 cm tops / D 20 mm).


- In multi-workstation version with back-to-back tops, a 30 mm gap is provided between the tops to feed cables or install a space divider.



- 100 % PEFC tops from sustainably managed forests.
- E1 certification in compliance with standard NF EN-717-2.
- M2 fire classification.

Legs


- Telescopic metal structures (single or multi-workstation versions) with legs composed of 3 sections, made of square 70 x 70 mm.

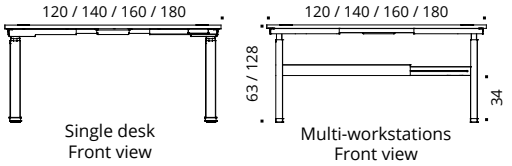

Single desk
Front view


Multi-workstations
Front view

- Electrically height-adjustable (from H63 to H128 cm) tops.

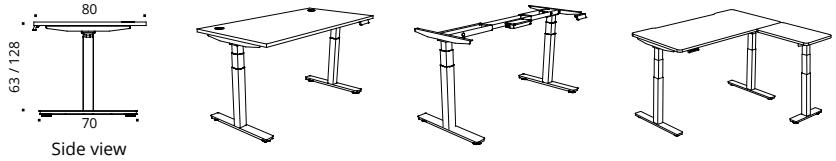

Side view

- For multi-workstation desks, telescopic metal cable tray (with cover) in central position in option.

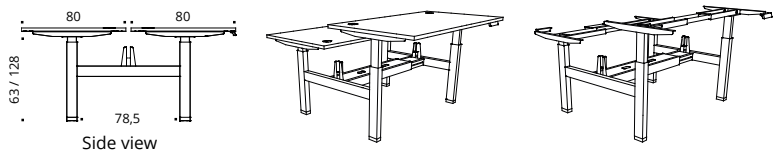

Side view

- Motorised height-adjustment system (drive unit built into each leg), with up & down control unit. 4 programmable positions and 1 USB A charging socket 5v + 1 USB C charging socket 5v.




- Anti-collision safety device with gyroscopic sensor, built into the drive unit.
- Displacement speed 40 mm/s. Sound level <50 decibel. 20 000 cycles over 5 years. 1200 N push force.
- Maximum load 120 kg per top.
- 100 - 240 V and 50 - 60 Hz power supply unit. 3 m power supply cable. Standby consumption of 0,8 W/h.
- Finishes available : aluminium (RAL 9006) – white (RAL 9010) – black (RAL 9005).
- Adjustable screw feet (Ø 60 mm), stroke 10 mm, mounted on metal thread.

Meeting table

- Structurex® - Melamine-coated particle board, 25 mm thick, high density 65 0 kg/m3 (+/-5 %), 2 decorative sides counterbalanced with anti-reflection treatment.
- 2 mm thick shock-proof ABS straight edging, radiused and matching the top finishes.
- Metal inserts for improved tear resistance and easier assembly.
- Dimensions : L 200 x D 100 cm.


Barrel tables :

- Top fitted with 2 part-drilled cable ports under the top for cable management or built-in electrical socket strip (cutout dim. L 313 x D 59 mm), equipped with 3 power outlets + 1 USB A charging socket 5v + 1 USB C charging socket 5v + 1 cable port.
- Metal structure, made of square 70 x 70 mm with electrically height-adjustable legs composed of 3 sections, connected by a telescopic beam, available in aluminium (RAL 9006) – white (RAL 9010) – black (RAL 9005) finishes, matching to the leg finishes. Height adjustable top from H 63 to H 128 cm.

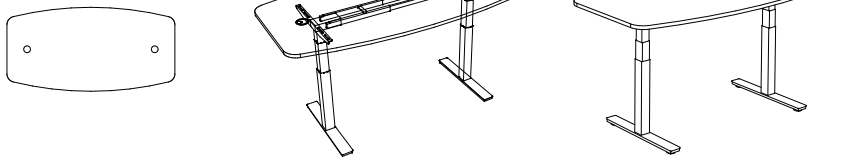

Rectangular tables

- Top fitted with or whitout built-in electrical socket strip (cutout dim. L 313 x D 59 mm), equipped with 3 power outlets + 1 USB A charging socket 5v + 1 USB C charging socket 5v + 1 cable port.
- Metal structure, made of square 70 x 70 mm with electrically height-adjustable legs composed of 3 sections, connected by a telescopic beam, available in aluminium (RAL 9006) – white (RAL 9010) – black (RAL 9005) finishes, matching to the leg finishes. Height adjustable top from H 63 to H 128 cm.

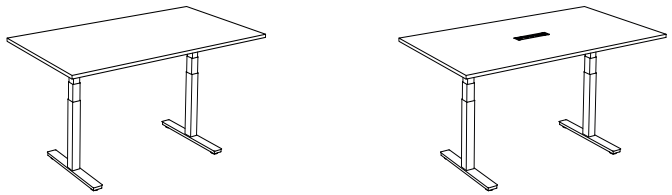

Cable management

- **Tops :**



Cable ports : Tops D 80 cm fitted with cable ports (Ø 80 mm) finishes matching the leg finishes.



Top Access : Tops D 80 cm fitted with single opening Top Access hatch (internal dimensions L 309 x D 116 mm), centred and positioned 50 mm from the outer edge of the top. Aluminium, black or white finishes matching the leg finishes. Optional cable trays.




Scalloped edge : Tops D 80 cm with groove (internal lengths : L 50 cm for L 120 cm tops, L 70 cm for L 140 cm tops, L 90 cm for L 160 cm tops, L 110 cm for L 180 cm tops / D 20 mm).

- **Structures :**
  - Horizontal cable management inside the telescopic metal cable tray (with cover) in central position (multi-workstation desks) in option.

- **Metal cable tray :**

Universal cable tray :




- Optional sheet steel metal cable tray.
- For single desks **(compatible with the optional fabric acoustic screen panel).**
- Attachment by wood screws under the top.
- Cable tray D 120 x H 90 x L 600 mm (under the top). Internal height : 80 mm.
- Aluminum, white or black finishes.

ENVOL Evo

Single cable tray :

- Optional cable tray (1,2 mm thick sheet steel)
- For multi-workstation desks L 120 > L 180 cm, complementary to the structural metal tray, to accommodate large numbers of cables.
- Attachment by wood screws under the top.
- Cable tray D 160 x H 80 mm (under the top). Internal dimensions : D 135 x H 40 mm
- Internal lengths : L 90 for L 120 cm desk, L 110 for L 140 cm desk, L 130 for L 160 cm desk, L 150 for L 180 cm desk.
- Aluminum, white or black finishes.




- **Extendable spine cable channel :**
  - White or black ABS extendable spine cable channel.
  - Dimensions : Ø 9 cm / Extendable height adapted to the desk, with up to 1,5 m.
  - To be fixed by wood screws under top.
  - Weighted base to remain on the ground when adjusting the desk.




[Options]

- **Fabric acoustic screen panels :**
  - The fabric screens comprise 1 x 19 mm thick Nitech® honeycomb melamine coated panels with rounded corners (radius 30 mm) covered with foam sound-absorbing melamine, 25 mm thick.
  - Screens covered in Step Melange fabric, 100% Trevira CS, M1 fire resistance panel, certified Oeko-Tex.
  - 4 sizes of fabric front dividers : L 120 / L 140 / L 160 / L 180 cm x H 67 cm.
  - Metal fixing clamps available in aluminium finish for single desks, and matching the desk leg finishes for multi-workstation desks.

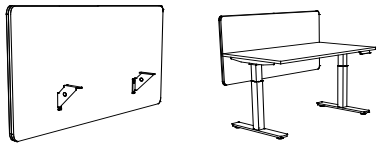


Screen panel – single desk

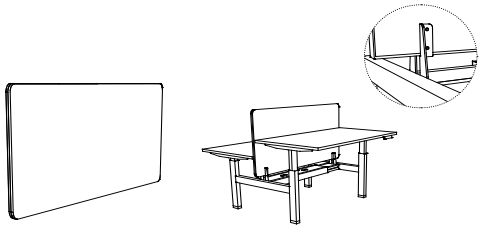



Screen panel – multi-workstation desks

- **Plexiglass topper for fabric screen :**
  - H 30 cm toppers in transparent 6 mm thick plexiglass with round corners.
  - Metal fixing clamps perfectly suited for positioning on top of our fabric screens.
  - Total height of fabric screen and screen topper : 100 cm.




- **Metal drawer :**
  - Dimensions : D 27 x H 5 x L 74 cm
  - Internal Dimensions : D 24 x H 4 x L 67 cm
  - Attachment by wood screws under the top.
  - Drawer with ball slide.
  - Handle L 10 x D 2 cm.





- **Safety spacer :**
  - Dimensions : D 7,5 x H 4 x L 27 cm
  - Metal spacer, black epoxy finish
  - Allows you to connect 2 height-adjustable multi-station desks in order to maintain a distance and secure the movements of the tops by avoiding collisions between 2 multi-workstation desks.





buronomic

ZI du Poudreux
Route Samuel de Champlain
14600 Honfleur

Tel : +33 (0)2 31 81 66 00

www.buronomic.com
contact@buronomic.com

The data in this sheet is valid at the date of preparation.
Any evolution of the product does not systematically give rise to update when the fundamental characteristics of the product are not modified.
The manufacturer reserves the right to change the product without notice.
Version 03/2025