FIFTY-FIFTY

Reception



buronomic
FABRICANT FRANÇAIS


DATA **SHEET**

FIFTY-FIFTY

WARRANTY 10 YEARS

Top
25 mm thick Structurex® melamine-coated panels. 2 mm thick shock-proof ABS edging.

Side
25 mm thick Structurex® melamine-coated panels. 2 mm thick shock-proof ABS edging.

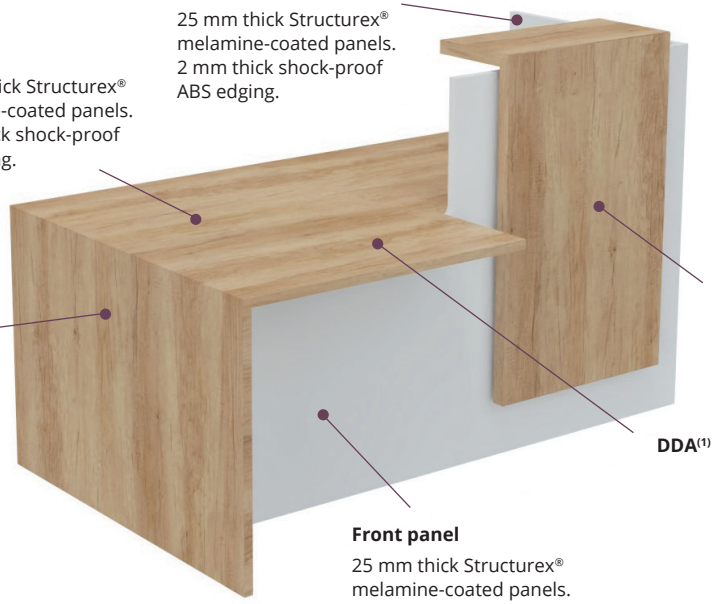

Leg
25 mm thick Structurex® melamine-coated panels. Leg and top are of the same finish.

Infill panel
Facing made of 38 mm thick Nitech® honeycomb melamine-coated panel, assembled with 45° mitre cut serving as reception shelf for visitors.

DDA(1)

Front panel
25 mm thick Structurex® melamine-coated panels.

Examples of decor variations




❶ White leg, top and infill panel

❷ Leg, top and infill panel wood MFC finish

❸ One-tone finish

2 infill panel positions
to free up worktop space



Infill panel mounted without spacer

Infill panel mounted with spacer


CHARACTERISTICS



Front panel and side MFC finishes




Leg, top and infill panel MFC finishes

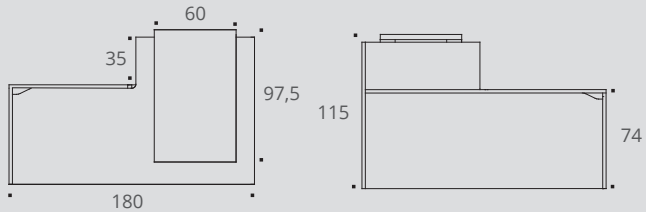

Front view


Rear view

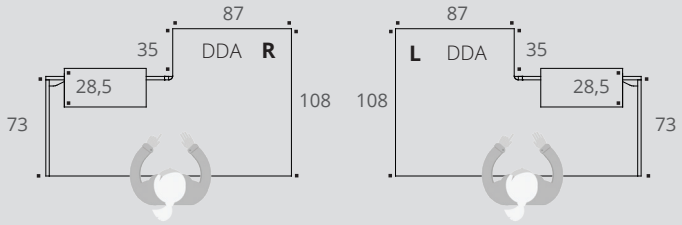

Top view - right hand DDA(1)

Top view - left hand DDA(1)

2 infill panel positions

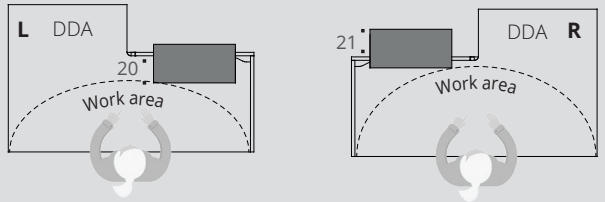

Infill panel without spacer
Top view

Infill panel with spacer
Top view

(1) DDA = Disability Discrimination Act

Counters

- Structurex® Melamine-coated particle board, 25 mm thick, high density 650 kg/m3 (+/-5 %), 2 decorative sides counterbalanced with anti-reflection treatment.
- 2 mm thick shock-proof ABS edging, radiused and matching the top finishes.
- Equipped with black anti-skid pads L 3,5 cm / D 1,8 cm.
- This reception counter exists in right hand DDA(1) or left hand DDA(1) version.
- Dimensions : L 180 cm x H 74 to 115 cm x D 73 to 108 cm.
- Facing made of 38 mm thick Nitech® honeycomb melamine-coated panel, assembled with 45° mitre cut and acting as reception shelf for visitors.
- 2 infill panel positions : infill panel available with spacers (choice during assembly) to free up the workspace and allow the positioning of computer screens over 20 inches.
- Fifty-Fifty reception counter features a cutouts on the worktop (D 4,5 cm x L 13 cm) and the front to feed cables from the worktop down to the floor.

- 100 % PEFC tops from sustainably managed forests.
- E1 certification in compliance with NF EN-717-2 standard.
- M2 fire classification.



Reception counter
with right hand DDA(1)




Reception counter
with left hand DDA(1)

(1) DDA = Disability Discrimination Act.





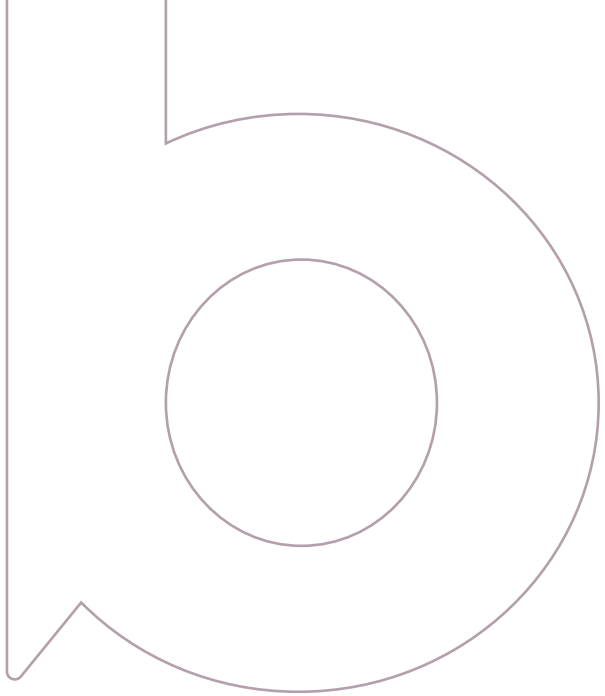

buronomic

ZI du Poudreux
Route Samuel de Champlain
14600 Honfleur

Tel : +33 (0)2 31 81 66 00

www.buronomic.com
contact@buronomic.com

The data in this sheet is valid at the date of preparation.
Any evolution of the product does not systematically give rise to update when the fundamental characteristics of the product are not modified.
The manufacturer reserves the right to change the product without notice.
Version 05/2024