SOLUTION Folding tables

Meeting



SOLUTION Folding tables

WARRANTY 10 YEARS

Top


25 mm thick Structurex® melamine-coated tops with rounded corners for optimum comfort. 2 mm thick shock-proof ABS edging.



Leg

The legs are equipped with adjustable screw feet giving up to 10 mm of adjustement.


CHARACTERISTICS




Metal legs finishes



Tops MFC finishes



Bottom view



Side view

Top


- Structurex® Melamine-coated particle board, 25 mm thick, high density 650 kg/m3 (+/-5 %), 2 decorative sides counterbalanced with anti-reflection treatment. Straight corners.
- 2 mm thick shock-proof ABS edging, radiused and matching the top finishes.
- Metal inserts for improved tear resistance and easier assembly.
- 70 cm deep to take up minimum space.
- 100 % PEFC tops from sustainably managed forests.
- E1 certification in compliance with NF EN-717-2 standard.
- M2 fire classification.

Leg


- Dimensions : D 4 x L 60 x H 72,5 cm (including screw feet).
- «I» shaped metal leg composed of 2 tubes Ø 30 mm welded on the tube Ø 35 mm base, black (RAL 9005) and chrome-plated finish.
- The legs are equipped with adjustable screew feet, of diameter 25 mm and range 10 mm to compensate for uneveness in the floor.

Folding mechanism

- The folding mechanism of the legs was selected for easy handling and its secure locking system in open and closed positions.
- The bases are easy to manoeuvre.
- In folded position, the table is only 12 cm thick.
- Plastic buffers to protect the table tops in folded position.

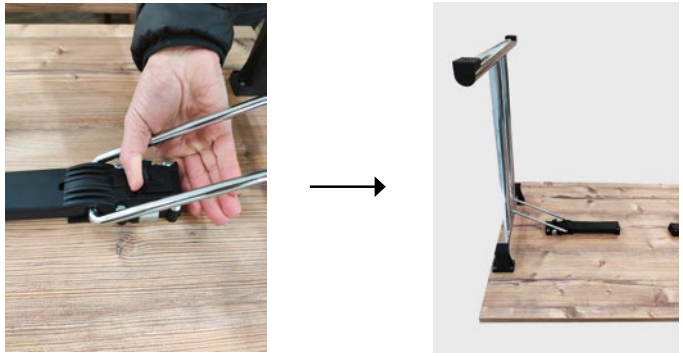

Handles to unlock the legs under the tops

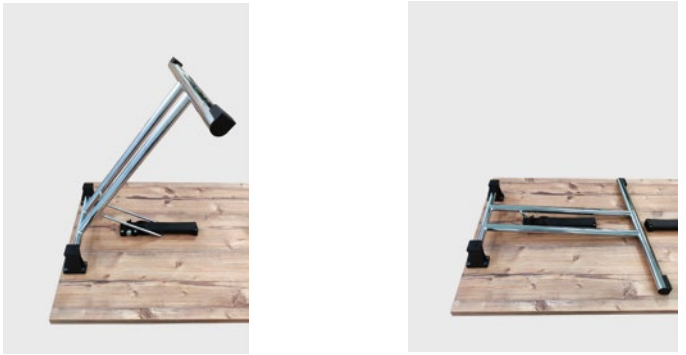

buronomic

ZI du Poudreux
Route Samuel de Champlain
14600 Honfleur

Tel : +33 (0)2 31 81 66 00

www.buronomic.com
contact@buronomic.com

The data in this sheet is valid at the date of preparation.
Any evolution of the product does not systematically give rise to update when the fundamental characteristics of the product are not modified.
The manufacturer reserves the right to change the product without notice.
Version 03/2025